

OMNIWRAP

Hose and cable armor

A heavy duty spiral wrap for use where extra protection and harness wrapping strength is required.



Omniwrap is an economical polyethylene coil product that protects hose, electrical cables, and other flexible lines that require a high degree of protection due to the application or environment.

Omniwrap can be used on single hoses and cables for protection from abrasion, friction or cutting. It can be used as a heavy duty harness to hold together a number of hoses. A unique feature of Omniwrap is the ability to install it with the hose lines already in place.

- Easy Installation
- Flexible
- Lightweight
- Impact Resistant
- Rot and Rust Resistant
- Reusable
- Heavy duty wall thickness
- Flame retardant
- UV resistant



When extra protection is required

Custom Options:

(Minimum quantity may apply)

- Variety of colours
- Custom densities
- Pitch (band widths)
- Length patterns

Specifications:

- Heavy duty polyethylene
- Temperature range: -70°F to 212°F (-57°C to 100°C) available 250°C (121°C)
- Meets FMVSS flame tests
- Immune to attack by most chemicals
- Tight grip prevents sliding or leap-frogging


Ideal for:

- Logging • Mining • Construction • Backhoes
- In-plant Machinery • Industrial/Utility
- Marina Rope • Auto Carriers
- Electrical Cable • Forestry Equipment • More



Part Number	Box Quantity (ft)	Wall Thickness (in)	Fits Min/Max Hose ID-OD (in)
OWHD-08 *	100 ft.	0.089"	½" to 1"
OWHD-12 *	100 ft.	0.118"	¾" to 1 ½"
OWHD-16 *	50 ft.	0.150"	1" to 2"
OWMD-16 *	50 ft.	0.100"	1" to 2"
OWHD-20 *	100 ft.	0.197"	1 ¼" to 2 ½"
OWHD-20B	100 ft.	0.197"	1 ¼" to 2 ½"
OWMD-20 *	100 ft.	0.120"	1 ¼" to 2 ½"
OWHD-24 *	100 ft.	0.230"	1 ½" to 3"
OWHD-24B	100 ft.	0.230"	1 ½" to 3"
OWMD-24 *	100 ft.	0.140"	1 ½" to 3"
OWHD-32B *	50 ft.	0.230"	2" to 3 ½"
OWHD-32DB	50 ft.	0.230"	2" to 3 ½"
OWMD-32 *	50 ft.	0.175"	2" to 3 ½"
OWMD-32B	50 ft.	0.175"	2" to 3 ½"
OWHD-48 *	50 ft.	0.250"	3" to 5"
OWHD-48B *	50 ft.	0.250"	3" to 5"
OWHD-48DB	50 ft.	0.250"	3" to 5"
OWMD-48	50 ft.	0.170"	3" to 5"
OWHD-56	50 ft.	0.250"	3 ½ to 6"
OWMD-56	50 ft.	0.170"	3 ½ to 6"
OWHD-64 *	44 ft.	0.268"	4" to 7"
OWHD-64B *	44 ft.	0.268"	4" to 7"
OWHD-64DB	44 ft.	0.268"	4" to 7"
OWHD-72 *	20 ft.	0.268"	6" to 10"
OWHD-72B *	20 ft.	0.268"	6" to 10"
OWMD-72	20 ft.	0.170"	6" to 10"

* Denotes popular size. Custom colours are available. B in part number denotes beveled edge, DB in part number denotes double beveled edges.

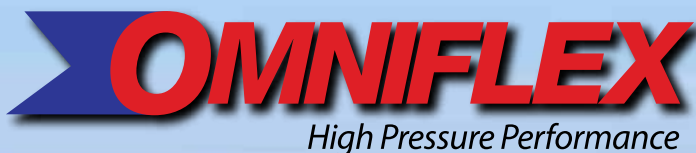

www.omniflex.ca